ENGINEERING TOMORROW



Programmable Room Thermostats | TPOne™

Meet the **TPOne**Intelligent controls made easy

The TPOne programmable room thermostat makes it simple for homeowners to flexibly control heating while reducing energy use.





Danfoss TPOne

Intelligent controls made easy

With our new TPOne programmable room thermostat, Danfoss has made intelligent heating control easier than ever before. Packed with practical and easy-to-use innovations, TPOne has been designed to suit almost any domestic heating control application. Easy to install and beautifully simple to live with, TPOne elegantly combines all the functionality of our existing TP models into one stylish unit.

Product highlights

- Homeowners can easily access comfort modes or change settings
- Intuitive user interface with clear icons
- · Fast installation with familiar wiring
- Quick-start setup wizard and separate installer menu with lock
- Versatile and simple 7-day programming
- Standby with Frost Protection
- On/off load compensation offering energy saving benefits
- Boiler service timer and optional external sensor input
- Selectable domestic hot water channel (TPOne-M only)
- Standard, delayed or optimised start-up
- Available in battery, wired or wireless versions



Comfort settingsSimple and effective

Danfoss TPOne features four dedicated comfort modes that can be activated at the touch of a button.

As a programmable room thermostat, heating is conveniently controlled by preset schedules. But should the user's needs change at short notice, the comfort buttons make it simple to adjust the settings.

The comfort mode buttons manually override the existing setting and stay in place until the next scheduled heating change – so there's no need to remember to switch back to automatic control.







Away



Asleep



Standby

Introducing new fast access comfort modes to easily change

home comfort settings

Easy-to-read display - Large display with simple icons to show each function. 21.5 Comfort modes - Single-touch options to quickly switch between settings. Comfort modes - Single-touch options to quickly switch between settings.



Fast installation with familiar wiring

With a highly intuitive user interface, the TPOne combines fast installation and setup menus with one-touch controls to confirm status and current settings.

Familiar wiring ensures installation is easy, quick and accurate.



Flexible and easy programming

TPOne features easy programming, including true 7-day scheduling and a holiday function, and can even be used to control a hot water cylinder.

The user-friendly interface provides the flexibility to make temporary changes to pre-programmed schedules to save energy or increase comfort – all at the touch of a button.



Energy-saving benefits

TPOne offers on/off load compensation, making it ErP Class 4. When on/off load compensation is activated, the thermostat establishes a fixed cycle rate for the system and then determines the duration of On/Off periods within each cycle. This optimises both boiler efficiency and comfort.






One touch energy saving

Independent tests have shown that lowering home comfort temperature by just one degree can reduce energy consumption by as much as 10%.

TPOne's innovative 'Click & Save' function can lower all pre-defined comfort settings by one degree in just a few clicks.

This handy feature helps protect the environment and saves homeowners money at the touch of a button.

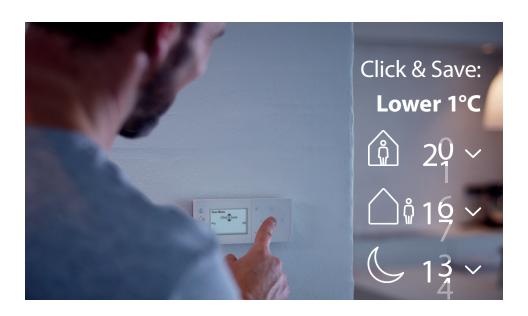

	TPOne-M	TPOne-B	TPOne-RF + RX1-S	
Thermostat Features		(a) (b) (21,5° (c)		
Ordering Codes	087N785200	087N785100	087N785400	
Code without receiver	-	-	087N785300	
Туре	Programmable Thermostat		RF Programmable Thermostat	
Power Supply TPOne	230Vac, 50/60Hz	2.5 - 3VDC (2 x	2.5 - 3VDC (2 x AA Alkaline Batteries)	
Battery Life	-	Min 2 years	Min 2 years	
Power Supply RX1-S	-	-	230Vac, 50/60Hz	
Output Channel 1	Volt free, SPDT type 1B		Volt free, SPDT type 1B (RX1-S)	
Switch Rating Channel 1	3A at 230Vac	3A at 230Vac	3A at 230Vac (RX1-S)	
Output Channel 2	3A at 230Vac	-	-	
Operating Frequency	-	-	433.92MHz	
Maximum Range	-	-	30 metres	
Setting Temperature Range	5-35 ℃			
Operating Temperature Range	0-45 °C			
IP Rating	IP20			
On/Off Control	Yes			
On/off load compensation	Yes			
Dimensions (mm)	H66 x W155 x D30			
Dimensions (mm) RX1-S	-	-	H84 x W84 x D28	

 $\mathsf{Danfoss}\,\mathsf{Ltd}\cdot\mathsf{Capswood}\cdot\mathsf{Denham}\cdot\mathsf{UB9}\,\mathsf{4LH}$

 $\textbf{Tel: 01895~617000} \cdot \textbf{Email: customerservice.uk@danfoss.com} \cdot \textbf{Website: www.heating.danfoss.co.uk}$

Danfoss can accept no responsibility for possible errors in catalogues, brochures, and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.